

AW-4600FX

The integrated semi-automatic weigh/wrap/label system



SIRLOIN STEAK				
PLU No.	PT No.	VCURT kg	net kg	TOTAL PRICE
000001	0.023	-0.023	15.00	0.00
PLU LIST	PLU BRAND	PLU PLS	PLU PLS	PLU PLS
PLU COPY	DIAGRAM	PLU PLS	PLU PLS	PLU PLS
PLU COPY	PLU PLS	PLU PLS	PLU PLS	PLU PLS
PLU COPY	PLU PLS	PLU PLS	PLU PLS	PLU PLS
PLU COPY	PLU PLS	PLU PLS	PLU PLS	PLU PLS
PLU COPY	PLU PLS	PLU PLS	PLU PLS	PLU PLS
PLU COPY	PLU PLS	PLU PLS	PLU PLS	PLU PLS
PLU COPY	PLU PLS	PLU PLS	PLU PLS	PLU PLS



Ethernet Network
TCP/IP

**Meat? Cheese?
Delicatessen? Fruits
and vegetables?
The AW-4600FX is here!**



The AW-4600FX further improves your backroom operations with its enhanced versatility!

Its advanced Pick-Pack System allows you to gently, yet securely wrap even fragile unstable products without trays, as carefully as by hand. The space saving design enables all operations to be carried out from the front of the machine for working efficiency.

Easy cleaning to keep high sanitation with detachable and washable Elevator Head



Twin labeller type available for printing sales promotional label



Specifications

Wrapping

- Weighing range — Please refer to the "Weighing" section
- Package size — Width: 80 - 350mm/ 3.2 - 13.8 inches
Depth: 80 - 230mm/ 3.2 - 9.0 inches
Height: 10 - 130mm/ 0.4 - 5.1 inches
The maximum combination of the above dimensions is not available and the available package size depends on the film width.
- Wrapping speed — Max. 14 packages/min.
- Number of film roll — One roll
- Film width — 350 - 500mm / 13.8 - 19.7 inches

Weighing

Interval type	Multi-interval		Single interval
Capacity	Max 6/15kg	Max 3/6kg	Max 30 lb
Scale interval	e=2/5g	e=1/2g	e=0.01 lb
Weighing range	40g - 15kg	20g - 6kg	0.20 - 30 lb
Max. wrapping capacity	5kg	5kg	11 lb

Labelling

- Label type — Thermal paper
- Labelling application — Manual
- Label size — Width: 40 - 80mm
Length: 20 - 150mm

Console


- Display panel — 10.4 inches TFT color
- Keypad — Pictograph type
- Programmable items — PLU No., commodity name, ingredient, unit price, price, tare weight, sell-by-date, taste-by-date, department name, barcode (UPC, EAN), target weight, special message, advertising message, shop name & logo, extra print format, wrapping conditions, etc.

General


- Externals — Resin and stainless steel construction
- Power source — 208/240, 346 - 440V (for Europe)
3phase, 50/60Hz
*440V for Europe
- Power consumption — 1.5kVA
- Net weight — Approx. 280kg / 617 lb
- Operation humidity — 90%RH(max.)

Dimensions


Top View

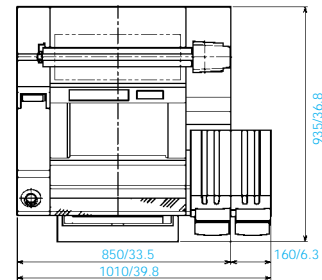

Front View

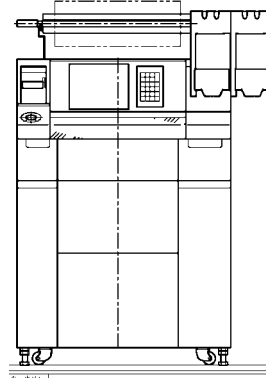

Side View

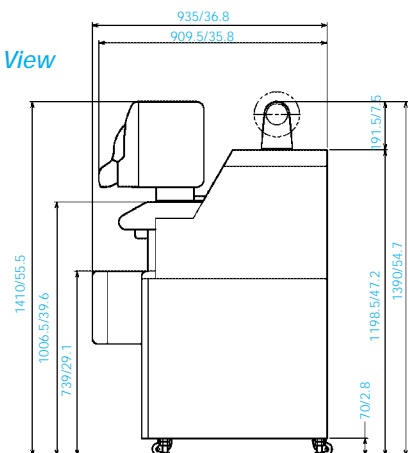


Unit=mm/inches



*Specifications are subject to change without prior notice.

TERAKO SEIKO CO., LTD.

5-13-12 Kugahara, Ohta-ku,
Tokyo 146-8580 Japan
TEL:+81-3-3752-0327 FAX:+81-3-3752-5814
http://www.digisystem.com
e-mail:info@hq.digi.co.jp



DIGI I's LTD.